



Key Features

• Constant Voltage LED Driver

• Input Voltage: 200 – 240Vac

• Input Frequency: 50Hz

• Output Power: 60W


• Built-in PFC function: (≥0.9)

• Protections: Short circuit/ Overload/ Over Temp.

• Low profile and light-weight plastic case

• 3 year warranty

Dimensions

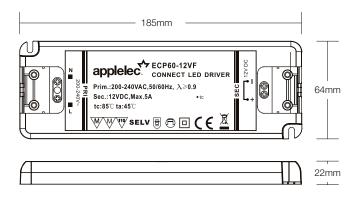

Specification

	MODEL	ECP60-12VF	
	OUTPUT	RATED VOLTAGE	12V
		VOLTAGE ACCURACY	±5%
		CURRENT RANGE	0-5A
		RATED POWER	60W
	INPUT	VOLTAGE RANGE	180-264VAC
		FREQUENCY RANGE	50-60Hz
		POWER FACTOR	≥0.9
		EFFICIENCY	≥85%
		INRUSH CURRENT (typ.)	60W at 230VAC
		NO LOAD POWER CONSUMPTION	<0.5W
	PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed
		OVERLOAD	>110% rated output power Hiccup mode, recovers automatically after fault condition is removed
	ENVIRONMENT	WORKING TEMP	-20°C – 45°C
		WORKING HUMIDITY	45-85%
	SAFETY & EMC	SAFETY STANDARDS	EN61347-1, EN61347-2-13
		EMC EMISSION	EN55015
		EMC IMMUNITY	EN61000-3-2; EN61000-3-3; EN61547
	OTHER	DIMENSIONS	185 x 64 x 22mm



